




Structural Wood Systems

321 Dohrimier St. / PO Box 250 - Greenville, Alabama 36037
 (334) 382-6534 Phone / (334) 382-4250 Fax
 Web Site: www.structuralwood.com - Email: sales@structuralwood.com

MATERIALS

Structural Wood Systems glulam members are Southern Pine, manufactured in accordance with ANSI A190.1-2022 and ANSI 117-2020. Copies can be provided upon request.

STANDARD SIZES

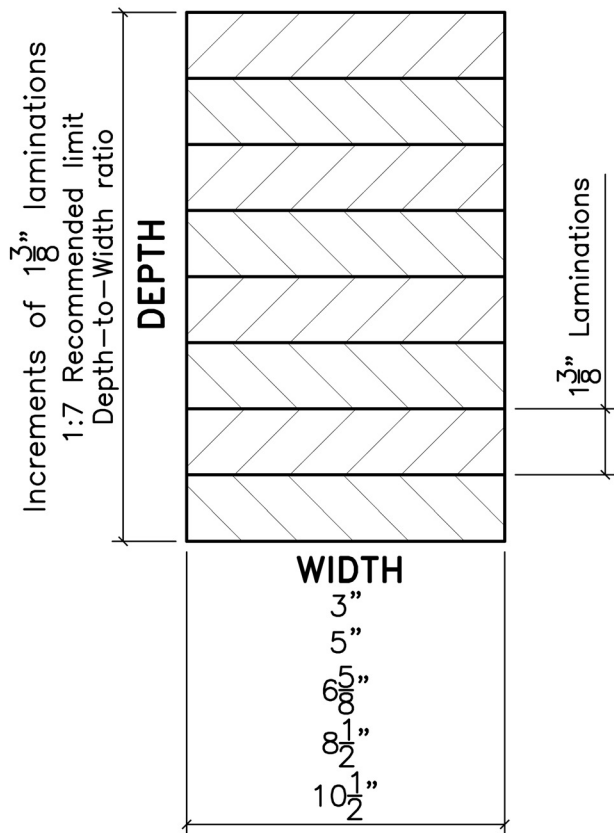

WIDTHS ABOVE SHOWN FOR ARCHITECTURAL OR PREMIUM APPEARANCE GRADE.
 INDUSTRIAL APPEARANCE GRADE CAN BE $\frac{1}{8}$ " WIDER.

- * Straight members can be cambered from 1/2" - 6"
- ** Members can be curved. Custom lamination thicknesses are used for radii less than 16'
- *** Custom sizes are available upon request

STANDARD DESIGN VALUES

Stress Class - 24F-1.8E

2,400	psi in Bending, F_{bx}
300	psi in Shear Parallel to Grain, F_v
740	psi in Compression Perpendicular to grain, $F_{c\perp x}$
1,800,000	psi in Modulus of Elasticity, E_x
1,150	psi in Tension Parallel to grain, F_t
1,650	psi in Compression Parallel to grain, F_c

Combination

- 24F-V3 SP/SP – Unbalanced Lay-up
- 24F-V8 SP/SP – Balanced Lay-up
- #49 Lay-up for primarily axially loaded members

Reference ANSI 117-2020 or The National Design Specification (NDS) for Wood Construction for a more comprehensive list and explanation of design values. Copies can be provided upon request.

ADHESIVES

Adhesives are waterproof complying with ANSI A190.1-2022 and contain no Urea Formaldehyde.

PRESERVATIVE TREATMENT

- When preservative treatment is necessary, pressure treat prior to gluing per AWPA U1 standards with:
 - MCA-C (.15 pcf) - water-borne for interior above ground use.
 - DCOI (.1 pcf) – oil-borne for interior/exterior above ground use
 - DCOI (.2 pcf) – oil-borne for interior/exterior ground contact

SPECIFICATIONS

A complete set of our recommended specifications can be provided upon request.

